


TapcoSlate Installed on Roof Pitches of 14 to 22.5 Degrees

From time to time, certain roofing applications require installation of the slates at a lower roof pitch, (transition roofs, porch roofs, etc.), thus requiring changes to the moisture intrusion protection as it relates to the underlay and slate exposure.

For roof decks having slopes of 14 degrees up to 22.5 degrees, a proprietary breather membrane which conforms to DIN EN 20811 Water Column should be used. Slate exposure must be at 6" (152mm) in order for the Tapco Warranty to remain in effect. The Deck should be a minimum 0.7" (18mm) OSB.

Tapco recommendations do not supersede local building regulation requirements, which should always be followed.

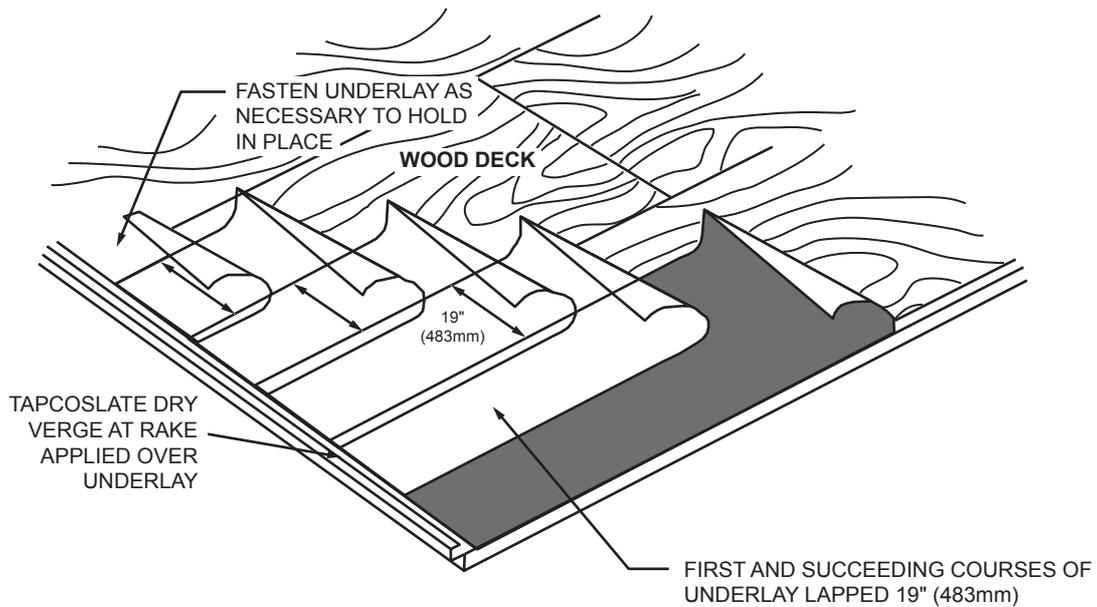

DOUBLE LAYER OF UNDERLAY